


GALVANISED SHORT LINK CHAIN TO DIN766

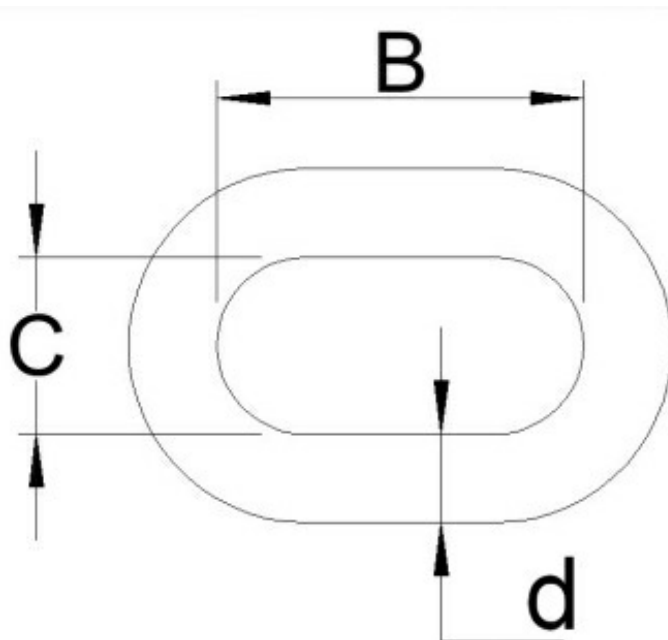

Size <i>d</i>	Code (<i>x</i> = length)	Weight/M (Kg)	<i>B</i>	<i>C</i>	SWL (Kg)	Std
5	206-5-G	0.7	18	6	250	DIN766
6	206-6-G	0.8	18	8	400	DIN766
8	206-8-G	1.42	24	10	750	DIN766
10	206-10-G	2.2	28	12	1500	DIN766
12	206-12-G	3.25	36	16	1750	DIN766
16	206-16-G	5.8	45	20	3120	DIN766
20	206-20-G	8.75	56	24	5000	DIN766

Notes : Dimensions are a guide and may vary slightly. Pls check with us for dimension critical applications.
 If Break (BL), Safe working load (SWL) or Working load limit (WLL) are shown:
 This is a guide only. (Do not use for lifting unless it is a certified lifting product)

SHORT LINK GALVANISED CHAIN TO DIN766

This type of Short link chain is calibrated to size and therefore can be used as Anchor chain and mooring chain, Our chain is made to DIN766, from Grade 3 Steel with a hot dipped galvanized coating. Strong and rust resistant. We also provide a stainless anchor chain. This is shown in a separate Datasheet

MATERIAL TYPE	Steel, HDG Galvanised
FINISH	Galvanised

ADVANTAGES

- Galvanised - prevents premature rust and corrosion
- Highly durable
- Good for use as a budget chain