


QUICK LINK STANDARD OPENING

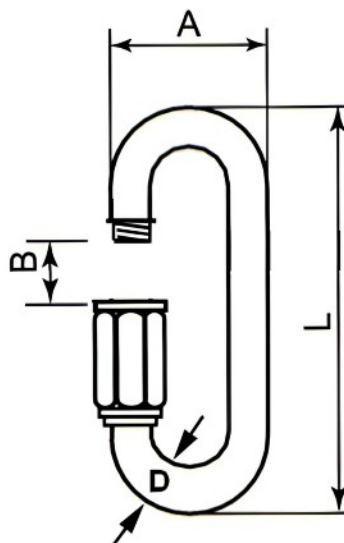

SIZE (d)	CODE	WEIGHT (g)	L	A	B	WLL (Kg)
4	SKU5360	12	39	19	5.5	150
5	SKU5400	21	48	23	6.5	240
6	SKU5440	36	57	26	7.5	340
8	SKU5480	80	74	35	11	600
10	SKU5520	140	90	42	12	750
12	SKU5530	225	105	48	15	1150

Notes : Dimensions are a guide and may vary slightly. Pls check with us for dimension critical applications.

If Break (BL), Safe working load (SWL) or Working load limit (WLL) are shown:
This is a guide only. (Do not use for lifting unless it is a certified lifting product)

QUICK LINK STANDARD OPENING

A4 stainless steel quick link (standard opening) is a sturdy and versatile connector commonly used in rigging, lifting, and outdoor applications. Crafted from A4 stainless steel, known for its excellent corrosion resistance and durability, the quick link features a threaded sleeve with a secure screw gate closure. This design allows for easy attachment and detachment of ropes, chains, or cables, providing a reliable and safe connection. Ideal for both temporary and permanent installations, the A4 stainless steel quick link is essential for various industrial, marine, and recreational uses where dependable linking and securing are required.

MATERIAL TYPE	A4 STAINLESS
FINISH	POLISHED

ADVANTAGES

- Highly durable
- A handy tool for various applications