


Triangular ring

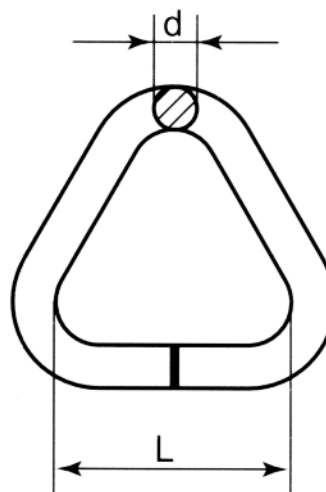

Code	d	L	WLL kg (guide)	Weight (g)
TR-5x25-A2	5	25	150	20
TR-5x30-A2	5	30	150	22
TR-5x45-A2	5	45	150	24
TR-6x40-A2	6	40	250	30
TR-6x45-A2	6	45	250	35
TR-6x50-A2	6	50	250	38
TR-8x50-A2	8	50	400	70

Notes : Dimensions are a guide and may vary slightly. Pls check with us for dimension critical applications.
 If Break (BL), Safe working load (SWL) or Working load limit (WLL) are shown:
 This is a guide only. (Do not use for lifting unless it is a certified lifting product)

Triangular ring

Rust resistant 304 stainless steel. Can be used for many different things such as attaching ropes and cables. The flat section is ideal for webbing or sail shades.

MATERIAL TYPE	A4 STAINLESS
FINISH	POLISHED