


## Fork to fork open body turnbuckle

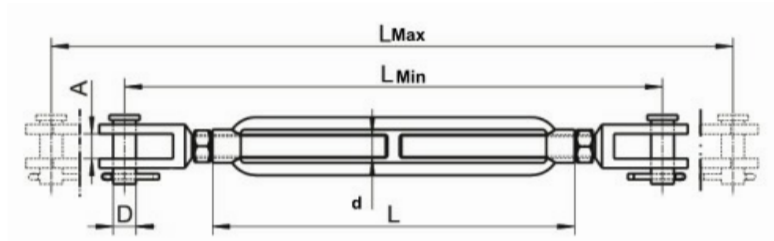

Size d/D	Code	Weight (g)	A	L	Lmin	Lmax	Break (kg) (Guide only)
M5	SKU3170	45	6.5	70	120	170	750
M6	SKU3172	90	7.5	90	140	205	1400
M8	SKU3174	150	11	120	180	270	2200
M10	SKU3176	250	12	150	220	330	3450
M12	SKU3178	600	14	200	300	455	5000
M16	SKU3182	1500	17	250	375	570	6800
M20	SKU3184	2200	20	300	450	680	8200

Notes : Dimensions are a guide and may vary slightly. Pls check with us for dimension critical applications.  
If Break (BL), Safe working load (SWL) or Working load limit (WLL) are shown:  
This is a guide only. (Do not use for lifting unless it is a certified lifting product)

### Open body turnbuckle with Fork and clevis pin ends

This is a “High end” turnbuckle and can be used for tightening applications. The clevis pin end give a reliable method of fixing products to it without any risk of loss. This is part of a range of many different Turnbuckles that are all 316 marine grade stainless. Use in applications such as catenary wires, rigging, fencing, sail shades.

See Hook to Hook, Eye to hook, eye to eye turnbuckles as alternatives

## ADVANTAGES

- Large tensioning range
- Nuts can be used for locking in place

MATERIAL	A4 STAINLESS
MATERIAL TYPE	MARINE GRADE STAINLESS
FINISH	POLISHED
NOTES	NOT TO BE USED FOR LIFTING PURPOSES