


GALVANISED LONG LINK CHAIN TO DIN766

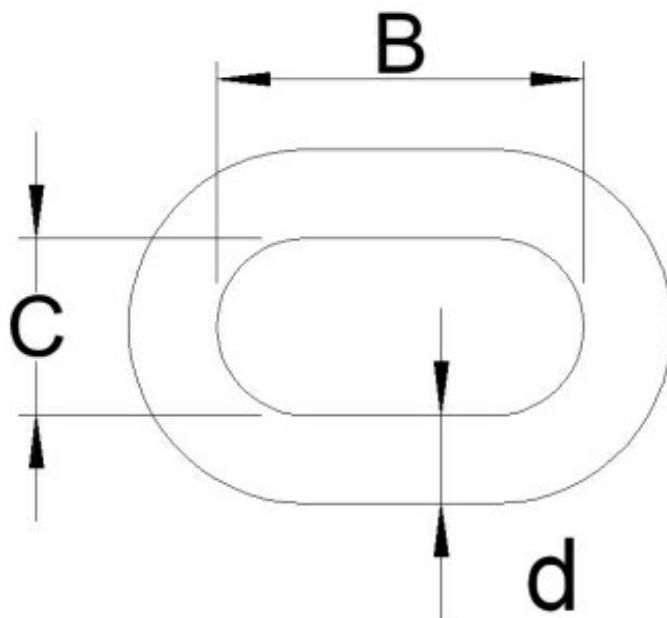

Size <i>d</i>	Code (<i>x</i> = length)	Weight/M (Kg)	<i>B</i>	<i>C</i>	SWL (Kg)	Std
7	207-7-G	0.9	38	14	450	DIN763
8	207-8-G	1.15	52	16	500	DIN763
10	207-10-G	1.8	65	20	1000	DIN763
12	207-12-G	2.8	78	24	1250	DIN763
16	207-16-G	4.45	100	32	2500	DIN763
20	207-20-G	7.45	120	35	4000	DIN763

Notes : Dimensions are a guide and may vary slightly. Pls check with us for dimension critical applications.
 If Break (BL), Safe working load (SWL) or Working load limit (WLL) are shown:
 This is a guide only. (Do not use for lifting unless it is a certified lifting product)

LONG LINK GALVANISED CHAIN TO DIN763

This type of chain is not calibrated and is cheaper than short link chain, it can be used as mooring chain, but is not recommended for anchors requiring a windlass as it is not calibrated to size.

Our chain is made to DIN763, from Grade 3 Steel with a hot dipped galvanised coating. Strong and rust resistant. We also provide a stainless anchor chain. This is shown in a separate Datasheet

MATERIAL TYPE	Steel, HDG Galvanised
FINISH	Galvanised

ADVANTAGES

- Galvanised - prevents premature rust and corrosion
- Highly durable
- Good for use as a budget chain