


GALVANISED BOW SHACKLE

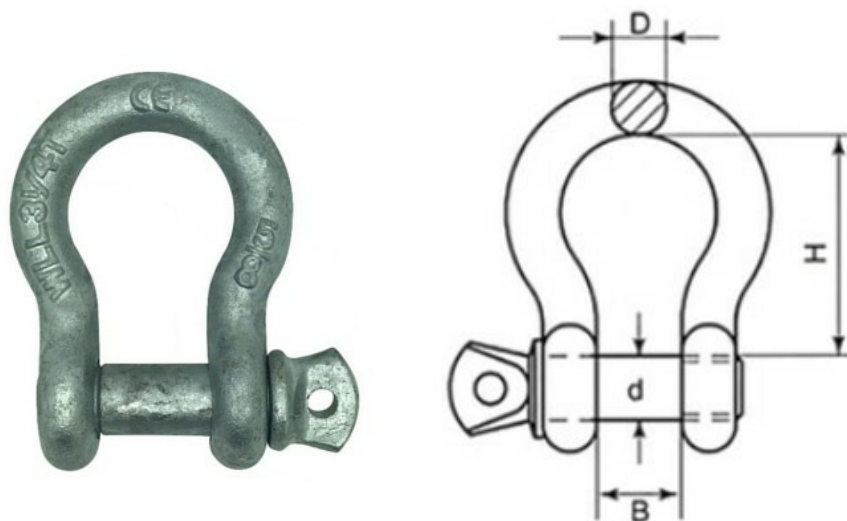

Code	SWL	D	d	H	B
42-050-G	0.50T	1/4"	5/16"	29	12
42-075-G	0.75T	5/16"	3/8"	31	13.5
42-100-G	1.00T	3/8"	7/16"	36	17
42-150-G	1.50T	7/16"	1/2"	43	18.5
42-200-G	2.00T	1/2"	5/8"	48	21
42-325-G	3.25T	5/8"	3/4"	61	27
42-475-G	4.75T	3/4"	7/8"	72	31
42-650-G	6.50T	7/8"	1"	83	36
42-850-G	8.50T	1"	1.1/8"	95	43
42-950-G	9.50T	1.1/8"	1.1/4"	108	46
42-1200-G	12.00T	1.1/4"	1.3/8"	115	51

Notes : Dimensions are a guide and may vary slightly. Pls check with us for dimension critical applications.

If Break (BL), Safe working load (SWL) or Working load limit (WLL) are shown:
This is a guide only. (Do not use for lifting unless it is a certified lifting product)

GALVANISED BOW SHACKLE

Galvanised Alloy steel Bow shackle made to U.S. Fed spec. RR-C-271. These shackles have a safe working load limit and a CE mark and size embossed onto them. It has a removable screw pin. This type of shackle can be used for lifting purposes.

ADVANTAGES

MATERIAL TYPE	GALVANISED
NOTES	CAN BE USED FOR LIFTING

- Galvanised - prevents premature rust and corrosion
- Good for use with many applications
- Highly durable
- Working load limit is embossed on the shackles so they comply with lifting safety standards