



# **STEEL GEAR**

## **GALVANISED BOW SHACKLE**



## **DATASHEET**

**STEELGEAR.CO.UK  
UNIT 9 THESIGER CLOSE  
WORTHING  
BN11 2RN**

**[www.steelgear.co.uk](http://www.steelgear.co.uk)  
[info@steelgear.co.uk](mailto:info@steelgear.co.uk)**

## SPECIFICATION :

---

### **GALVANISED BOW SHACKLE**


Galvanised Alloy steel Bow shackle made to U.S. Fed spec. RR-C-271. These shackles have a safe working load limit and a CE mark and size embossed onto them. It has a removable screw pin. This type of shackle can be used for lifting purposes.

<b>MATERIAL</b>	<b>GALVANISED</b>
MATERIAL TYPE	GALVANISED
FINISH	
NOTES	CAN BE USED FOR LIFTING

## **ADVANTAGES**

- Galvanised - prevents premature rust and corrosion
- Good for use with many applications
- Highly durable
- Working load limit is embossed on the shackles so they comply with lifting safety standards

## DIMENSIONS (mm)

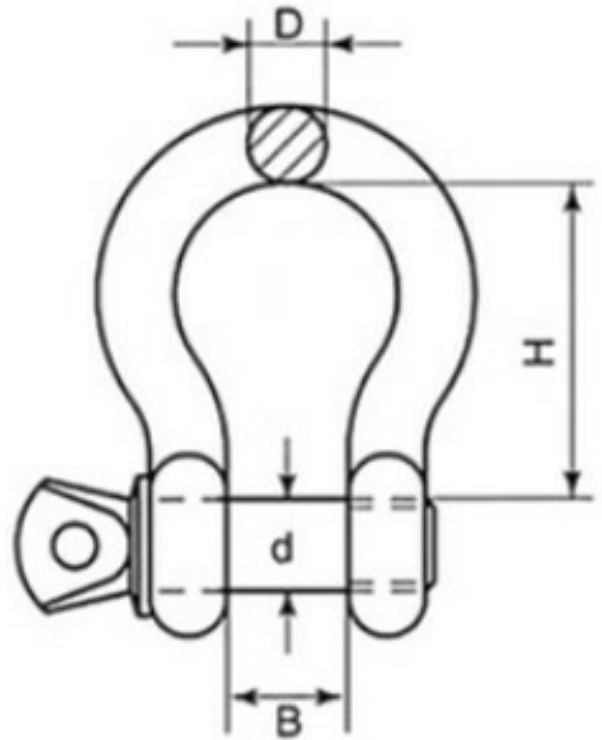

Code	SWL	D	d	H	B
42-050-G	0.50T	1/4"	5/16"	29	12
42-075-G	0.75T	5/16"	3/8"	31	13.5
42-100-G	1.00T	3/8"	7/16"	36	17
42-150-G	1.50T	7/16"	1/2"	43	18.5
42-200-G	2.00T	1/2"	5/8"	48	21
42-325-G	3.25T	5/8"	3/4"	61	27
42-475-G	4.75T	3/4"	7/8"	72	31
42-650-G	6.50T	7/8"	1"	83	36
42-850-G	8.50T	1"	1.1/8"	95	43
42-950-G	9.50T	1.1/8"	1.1/4"	108	46
42-1200-G	12.00T	1.1/4"	1.3/8"	115	51

**SWL or WLL = Safe working load limit (kg)** : This is the maximum weight the product should carry.

**BL = Break load** : This is the maximum weight to break for the product and will vary from batch to batch. You should only use the product at the WLL or 1/4 the break load.

The above are guides for sizing of products and not a recommendation.

Do not use any product for lifting unless drawing is marked suitable for lifting - with this symbol

