



STEEL GEAR

GALVANISED BOW SHACKLE WITH SAFETY PIN



DATASHEET

**STEELGEAR.CO.UK
UNIT 9 THESIGER CLOSE
WORTHING
BN11 2RN**

**www.steelgear.co.uk
info@steelgear.co.uk**

SPECIFICATION :

GALVANISED BOW SHACKLE WITH SAFETY PIN


Galvanised Alloy steel Bow shackle made to U.S. Fed spec. RR-C-271. These shackles have a safe working load limit and a CE mark and size embossed onto the shackle. It has a Safety pin lock for added safety. This type of shackle can be used for lifting purposes.

MATERIAL	GALVANISED
MATERIAL TYPE	GALVANISED
FINISH	
NOTES	CAN BE USED FOR LIFTING

ADVANTAGES

- Galvanised - prevents premature rust and corrosion
- Good for use with many applications
- Highly durable
- Working load limit is embossed on the shackles so they comply with lifting safety standards

DIMENSIONS (mm)

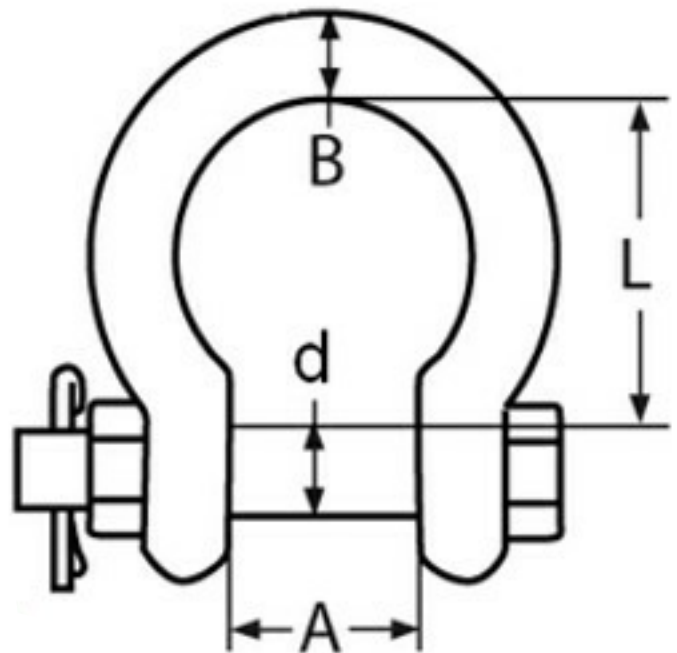

Code	SWL	D	d	H	B
43-075-G	0.75T	5/16"	3/8"	31	13.5
43-100-G	1.00T	3/8"	7/16"	36	17
43-150-G	1.50T	7/16"	1/2"	43	18.5
43-200-G	2.00T	1/2"	5/8"	48	21
43-325-G	3.25T	5/8"	3/4"	61	27
43-475-G	4.75T	3/4"	7/8"	72	31
43-650-G	6.50T	7/8"	1"	83	36
43-850-G	8.50T	1"	1.1/8"	95	43
43-950-G	9.50T	1.1/8"	1.1/4"	108	46
43-1200-G	12.00T	1.1/4"	1.3/8"	115	51

Notes about load limits where shown

SWL or WLL = Safe working load limit (kg) : This is the maximum weight the product should carry.

BL = Break load : This is the maximum weight to break for the product and will vary from batch to batch. You should only use the product at the WLL or 1/4 the break load.

The above are guides for sizing of products and not a recommendation.

Do not use any product for lifting unless drawing is marked suitable for lifting - with this symbol

