


DELTA QUICK LINK

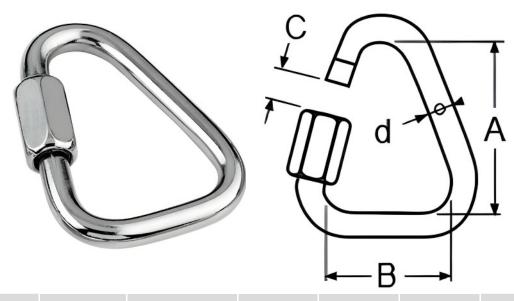

| SIZE (d) | CODE | WEIGHT (g) | С | A | В | WLL (Kg) |
|----------|---------|------------|-----|----|----|----------|
| 4 | SKU5708 | 15 | 5.5 | 31 | 26 | 150 |
| 5 | SKU5710 | 25 | 6 | 38 | 30 | 240 |
| 6 | SKU5712 | 40 | 7 | 44 | 34 | 340 |
| 8 | SKU5714 | 88 | 9 | 56 | 39 | 600 |
| 10 | SKU5716 | 156 | 12 | 66 | 46 | 750 |

Notes: Dimensions are a guide and may vary slightly. Pls check with us for dimension critical applications

If Break (BL), Safe working load (SWL) or Working load limit (WLL) are shown:

This is a guide only. (Do not use for lifting unless it is a certified lifting product)

DELTA QUICK LINK

This type of quick link can be used with webbing or to hold 3 items. Can be used with sail shades where the screw allows removal of the connecting item. The gate is locked closed by screwing the hex connector.

| MATERIAL TYPE | A4 STAINLESS |
|---------------|--------------|
| FINISH | POLISHED |

ADVANTAGES

- Highly durable
- A handy tool for various applications