


RIGGING SCREW SWAGE TO SWAGE

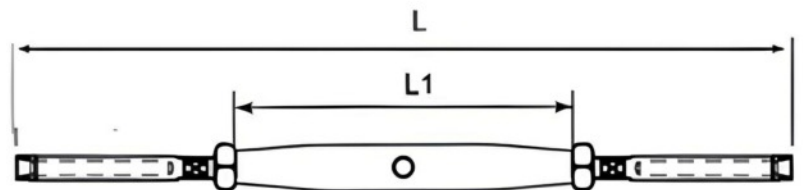

SIZE	CODE	WEIGHT (g)	Lmin	Lmax	L1	WIRE SIZE	BREAK (Kg)
M6	SKU2345	85	220	280	95	4	1300
M8	SKU2347	135	240	290	105	4	1300
M10	SKU2349	240	265	350	125	5	2350
M12	SKU2351	420	330	440	150	6	3500
M16	SKU2353	820	420	545	190	8	5100

Notes : Dimensions are a guide and may vary slightly. Pls check with us for dimension critical applications.
 If Break (BL), Safe working load (SWL) or Working load limit (WLL) are shown:
 This is a guide only. (Do not use for lifting unless it is a certified lifting product)

RIGGING SCREW SWAGE TO SWAGE

The function of a Rigging Screw is used as a tensioner or adjuster in wire rope assemblies. This could take the form of balustrading, running rigging or catenary wires. You tighten the wire by rotating the barrel of the Rigging Screw. This is useful both at installation and in routine maintenance.

MATERIAL TYPE	316 STAINLESS
FINISH	POLISHED

ADVANTAGES

- Strong & durable
- Quick and easy installation