


## ZINC PLATED QUICK LINK

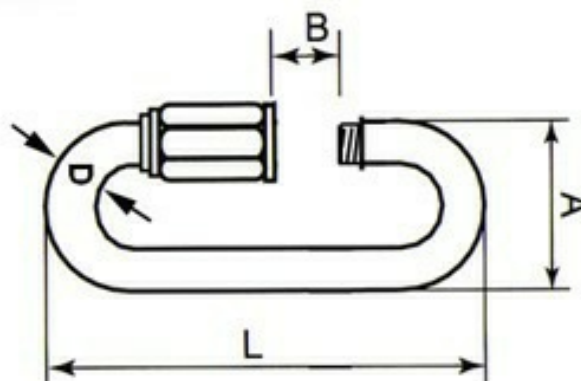

Size (D)	Code	A	B	L
3.5	656-3.5-BZP	16.5	5	37
4	656-4-BZP	19	7	43
5	656-5-BZP	23	7.5	50
6	656-6-BZP	26	7.5	58
7	656-7-BZP	30	10	72
8	656-8-BZP	34	10	74
9	656-9-BZP	37	10	81
10	656-10-BZP	41	13	90
12	656-12-BZP	47	14	108
16	656-16-BZP	62	22	153

Notes : Dimensions are a guide and may vary slightly. Pls check with us for dimension critical applications.  
 If Break (BL), Safe working load (SWL) or Working load limit (WLL) are shown:  
 This is a guide only. (Do not use for lifting unless it is a certified lifting product)

### ZINC PLATED QUICK LINK

Quick Links can be used as chain connectors, repair links, fixed climbing points and net fixings. They are equally useful in many other applications. They are preferred over snap hooks in multidirectional load situations.

<b>MATERIAL TYPE</b>	<b>Steel</b>
<b>FINISH</b>	<b>Electrogalvanised</b>