


Long Link Chain

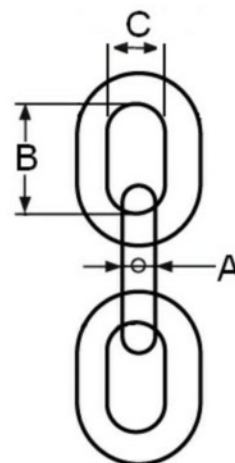

Part no. - A2	Part no. - A4	Size A (mm)	B	C	BL/kg
207-1.5-A2	207-1.5-A4	1.5	12	3	90
207-2-A2	207-2-A4	2	22	4	125
207-3-A2	207-3-A4	3	26	6	350
207-4-A2	207-4-A4	4	32	8	630
207-5-A2	207-5-A4	5	35	10	1000
207-6-A2	207-6-A4	6	42	12	1250
207-8-A2	207-8-A4	8	52	16	2500
207-10-A2	207-10-A4	10	65	21	4000
N/A	207-13-A4	13	82	27	6300
N/A	207-16-A4	16	100	33	

Notes : Dimensions are a guide and may vary slightly. Pls check with us for dimension critical applications.

If Break (BL), Safe working load (SWL) or Working load limit (WLL) are shown:
This is a guide only. (Do not use for lifting unless it is a certified lifting product)

LONG LINK CHAIN

Long link chain is manufactured to DIN763 and is Less expensive than it's short link similar type in DIN766.

This 316 stainless material has good Chloride resistance hence can be used for marine applications or Applications where the inert nature of stainless is required. The 304 stainless variety has slightly less corrosion resistance than 316

MATERIAL TYPE	A2 (1.4301) - AISI 304 STAINLESS	Measurements
	A4 (1.4401) - AISI 316 STAINLESS	
FINISH	POLISHED	Up to 3mm : DIN5685-1
		4mm and up : DIN763