


Hook to hook open body turnbuckle

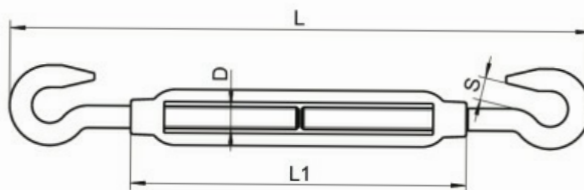

Size D	Code	Weight (g)	L	L1	S	Break (kg) (Guide only)
M5	SKU3214	45	120	70	8	750
M6	SKU3216	90	150	90	9	1400
M8	SKU3218	150	200	120	11	2200
M10	SKU3220	250	240	150	12	3450
M12	SKU3222	600	310	200	14	5000
M16	SKU3224	1500	390	250	16	6800
M20	SKU3226	2200	440	300	18	8200

Notes : Dimensions are a guide and may vary slightly. Pls check with us for dimension critical applications.

If Break (BL), Safe working load (SWL) or Working load limit (WLL) are shown:
This is a guide only. (Do not use for lifting unless it is a certified lifting product)

Turnbuckle open body with 2 hooks

This is a basic turnbuckle and can be used for tightening applications, such as sail shades or rope. this is part of a range of many different Turnbuckles that are all 316 marine grade stainless. Use in applications such as catenary wires, rigging, fencing, sail shades.

MATERIAL	A4 STAINLESS
MATERIAL TYPE	MARINE GRADE STAINLESS
FINISH	POLISHED
NOTES	NOT TO BE USED FOR LIFTING PURPOSES

ADVANTAGES

- Large tensioning range
- Quick and easy to use